

PROTO/DRAIN

COMPACT
ADJUSTABLE
SOLID STATE
VERSATILE

PROTO/DRAIN is designed to eliminate the problem of condensation in your pneumatic system.

The **PROTO/DRAIN** will automatically purge (drain) at regular intervals the liquid and gaseous substance that have been collected in the receiver (air tank, pneumatic system).

The **PROTO/DRAIN** comes with a solid-state adjustable timer where you can tailor-made (customize) the on/off purging cycle to suit your needs.

TIMING CYCLE:

Cycle: Drain valve closed; (adjustable from 1 to 60 min)

Purge: Drain valve open; (adjustable from 1 to 60 sec)

FEATURES:


- Our solid-state timer has a **4 Amperes** output such that a maximum of 3 more valves can be added in parallel.
- A Led indicator to show the valve purging state.
- A push button switch to cancel the valve closed cycle and activate the purging state.

SPECIFICATIONS:


Valve	— Asco
Connection	— 1/4 NPT
Pressure	— 165 PSI
*	— Also available valves of different connection and of different pressure
Timer	— Solid state
Voltage	— 115V 60Hz single phase.
Rated Output current	— 4 Amperes

GARANTEE:


PROTO/DRAIN is guaranteed against all defects of material and manufacturing for a period of one year starting from the date of purchase.

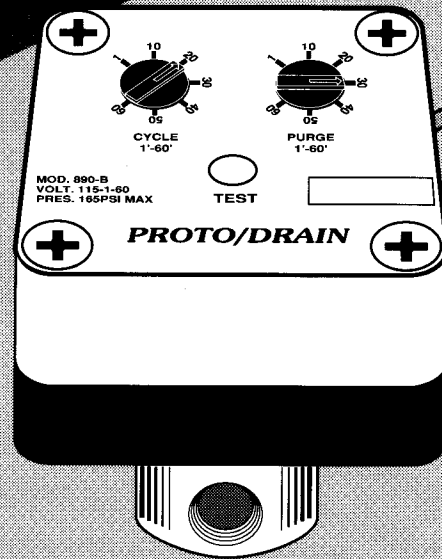


TYPICAL APPLICATIONS




SEPARATORS



REFRIGERATED AIR DRYERS



FILTERS



AIR RECEIVER TANKS

PHYSICAL DIMENSIONS

